

PCB Separator MAESTRO 3E




MAESTRO 3E separates both small and large pre-scord PCBs. The table and the rest can be continuously adjusted to the most suitable working position. The slit between the linear blade and the rest can be adjusted to ensure that the side strips fall through and are sorted out.




Safe Operation

The PCB is placed with its pre-scored groove onto the linear blade and the circular blade is then drawn by hand across the PCB. The clearance between the upper guide and the linear blade is adjustable to ensure that the PCB is only separated in the pre-scored groove.

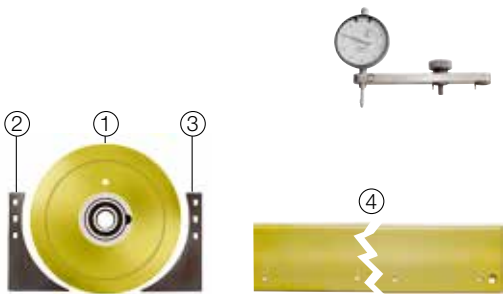

Technical Data		
Separation type	Component side	circular blade
	Solder side	linear blade
Operation	by hand	
Separation length	max. 450 mm	
Material	FR4, Aluminum	
Temperature/	Operation	+ 5 - 40°C / 10 - 85%
Humidity	Storage	+ 0 - 60°C / 20 - 80%
not condensing	Transport	- 25 - 60°C / 20 - 80%
Weight	22 kg	
Dimensions H x D x W	455 x 700 x 350 mm	
Approvals	CE, FCC class A	


Maximum height of components next to the groove.




Increase in external dimensions after separation.

typical 0.2 mm

The pre-scored grooves can be interrupted by cutouts with a length of up to approx. 5 mm.



If components project above the groove, the linear blade needs to be cut out. In such a case contact us.



Part No.		Description
8933945		PCB Separator MAESTRO 3E/450
Content of delivery	PCB Separator Hexagon key 2 mm Operation manual d/e	
Part No.		Accessories
8970208.001		Dial gauge for MAESTRO 3E/4S
Pos.	Part No.	Spare parts
1	8930509.001	Circular blade FR4
2	8936615.001	Guide
3	8936614.001	Guide
4	8933394.001	Linear blade 450

- Headquarters in Germany
- cab offices
520 partners
in over 80 countries

cab maintains a presence in the world's major economic areas.



Germany

cab Produkttechnik
GmbH & Co KG
Postfach 1904
76007 Karlsruhe
Wilhelm-Schickard-Str. 14
76131 Karlsruhe
Telefon +49 721 6626-0
Telefax +49 721 6626-249
www.cab.de
info@cab.de

Further partners
on request.

France

cab technologies s.a.r.l.
67350 Niedermodern
Téléphone +33 388 722 501
www.cab.de/fr
info.fr@cab.de

USA

cab Technology Inc.
Tyngsboro MA, 01879
Phone +1 978 649 0293
www.cab.de/us
info.us@cab.de

Asia 亚洲

cab Technology Co, Ltd.
希爱比科技股份有限公司
Junghe, Taipei, Taiwan
Phone +886 2 8227 3966
www.cab.de/tw
info.asia@cab.de

China 中国

cab (Shanghai) Trading Co.,
世博(上海)贸易有限公司
Phone +86 21 6236-3161
www.cab.de/cn
info.cn@cab.de

This documentation and any translations hereof are the property of cab GmbH & Co KG.

The replication, processing, reproduction or distribution in whole or in parts requires our prior written consent. © Copyright by cab/9008453.

All delivery, design and technical specifications are compiled to the best of our current knowledge and are subject to change without prior notice.